




BPP

AXIAL BATHROOM FANS / Wall Mounted

The front panel is larger and tighter. This feature provides a robust mounting design. It is silent and corrosion resistant. Long life of the motor against environmental factors. It has two-way operation. Meets the need for fresh air for indoor places;

in the other direction, exudes dirty air in the interior. Electrical control structure does not require external control or panel. Used in offices such as offices, meeting rooms, schools, smoking rooms.

Technical Drawing and Tables

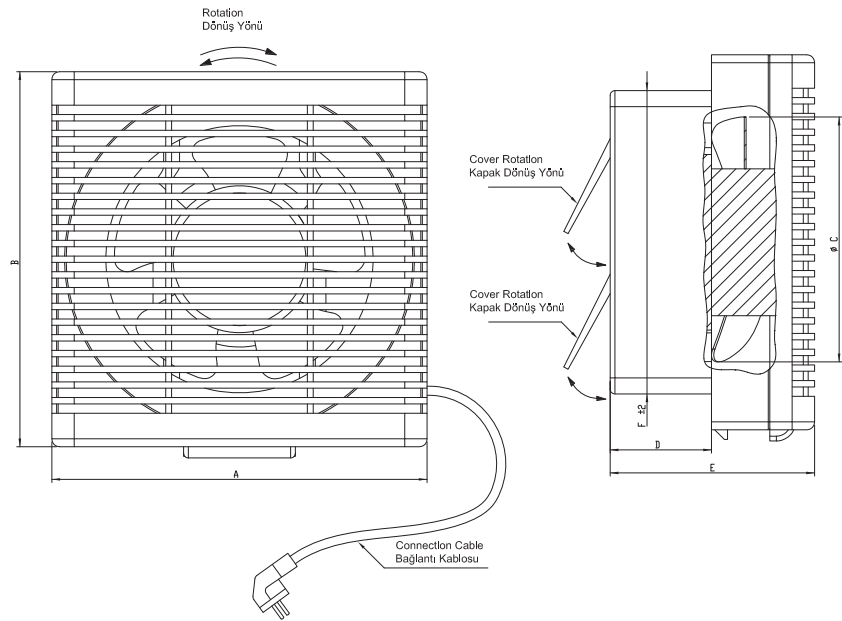


| TYPE | A | B | C | D | E | F |
|--------|-----|-----|-----|----|-----|-----|
| BPP 15 | 235 | 235 | 160 | 65 | 130 | 190 |
| BPP 20 | 290 | 290 | 200 | 65 | 140 | 240 |
| BPP 25 | 340 | 340 | 250 | 70 | 145 | 290 |
| BPP 30 | 395 | 395 | 300 | 80 | 155 | 335 |


Dimensions are in (mm)

| TYPE | VOLTAGE | FREQUENCY | POWER | CURRENT | CAPACITOR | SPEED | AIR FLOW | SOUND PRESSURE | INSULATION CLASS | PROTECTION CLASS | WEIGHT | PIECES IN BOX |
|--------|---------|-----------|-------|---------|------------|-----------|-------------------|----------------|------------------|------------------|--------|---------------|
| | V | Hz | W | (A) | (μ F) | r.p.m | m ³ /h | dB(A) | Ins.cl. | IP | kg | AD |
| BPP 15 | 230 | 50/60 | 25 | 0,10 | - | 1350/1620 | 300/360 | 40 | B | 20 | 1,8 | 5 |
| BPP 20 | 230 | 50/60 | 30 | 0,12 | - | 1250/1450 | 500/580 | 41 | B | 20 | 2,6 | 5 |
| BPP 25 | 230 | 50/60 | 35 | 0,15 | - | 1250/1375 | 735/810 | 43 | B | 20 | 2,8 | 5 |
| BPP 30 | 230 | 50/60 | 40 | 0,19 | - | 1100 | 1100 | 44 | B | 20 | 3,2 | 5 |


Sound Level Measured from 3m distance in room condition.

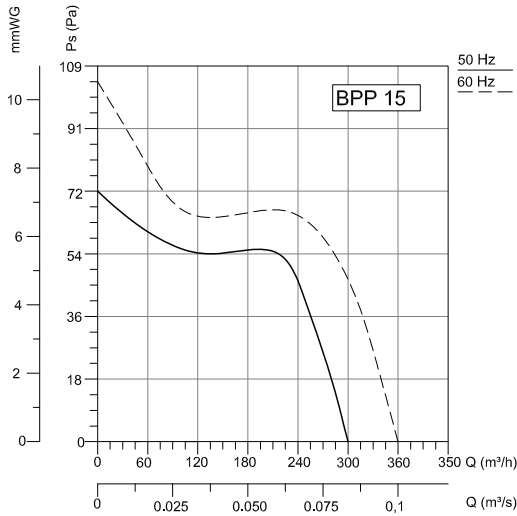


| Frequency | Tot | 63 | 125 | 250 | 500 | 1000 | 2000 | 4000 | 8000 | Hz |
|-----------------------------|-----|----|-----|-----|-----|------|------|------|------|-------|
| L _{WA} Surrounding | 47 | 24 | 43 | 36 | 41 | 36 | 34 | 31 | 29 | dB(A) |

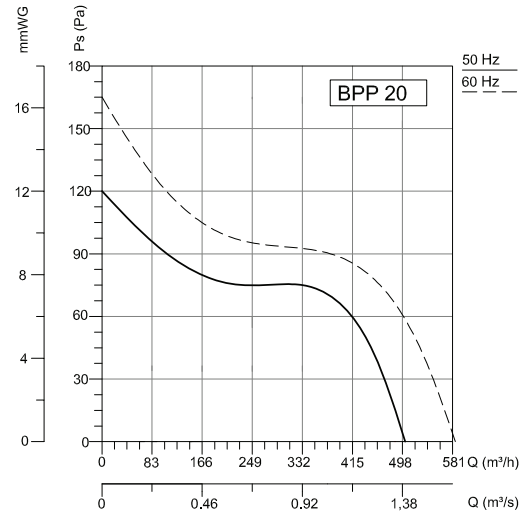

| Frequency | Tot | 63 | 125 | 250 | 500 | 1000 | 2000 | 4000 | 8000 | Hz |
|-----------------------------|-----|----|-----|-----|-----|------|------|------|------|-------|
| L _{WA} Surrounding | 48 | 25 | 44 | 37 | 42 | 37 | 35 | 32 | 30 | dB(A) |

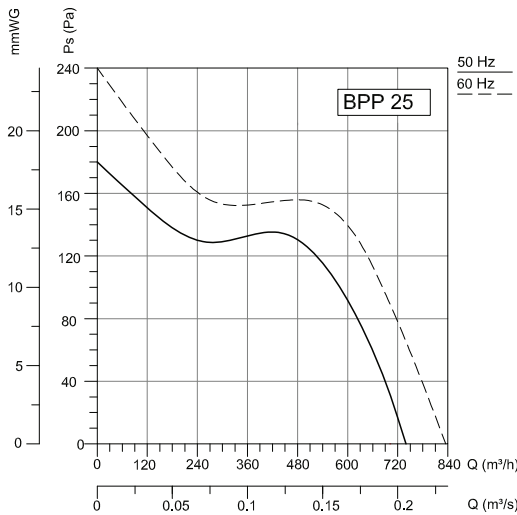

| Frequency | Tot | 63 | 125 | 250 | 500 | 1000 | 2000 | 4000 | 8000 | Hz |
|-----------------------------|-----|----|-----|-----|-----|------|------|------|------|-------|
| L _{WA} Surrounding | 50 | 25 | 39 | 41 | 47 | 41 | 39 | 34 | 39 | dB(A) |

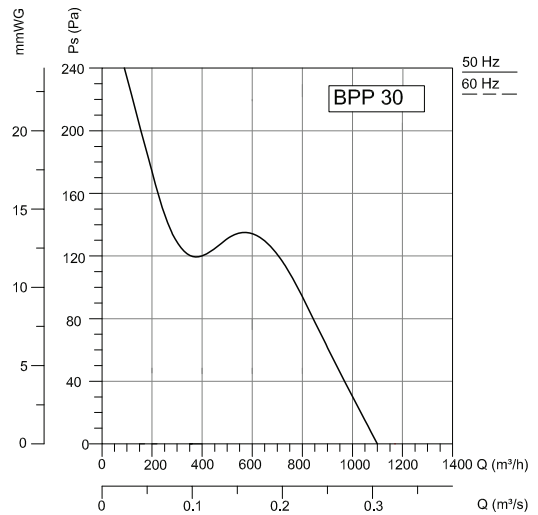

| Frequency | Tot | 63 | 125 | 250 | 500 | 1000 | 2000 | 4000 | 8000 | Hz |
|-----------------------------|-----|----|-----|-----|-----|------|------|------|------|-------|
| L _{WA} Surrounding | 51 | 23 | 35 | 39 | 49 | 43 | 41 | 35 | 28 | dB(A) |

Accessories



BSC