



DM900N-DC




DM450N

DM450N/DM900N-DC CEILING SUSPENDED ELECTRONIC AIR CLEANER With UVC Germicidal Irradiator

The DM450N/DM900N-DC is a commercial grade Electronic Air Cleaner with UVC Germicidal Irradiator. This unit is designed to be flush mounted to false Ceilings in the room. The DM450N/DM900N-DC is effective in removing dust, tobacco smoke, bacteria, pollen, lint and various pollutants. The UVC irradiator disables germs and bacteria in the environment, making the air cleaner and healthier. The air is purified and recycled back to the premises. This means there is no loss of cool or heated air from the premises as the dirty air need not be exhausted out from the premises.

The DM450N/DM900N-DC is suitable for use in offices, bars and restaurants, classrooms, clubs, smoking rooms, clinics, medical institutions etc.

HOW ELECTRONIC AIR CLEANERS WITH UVC WORKS

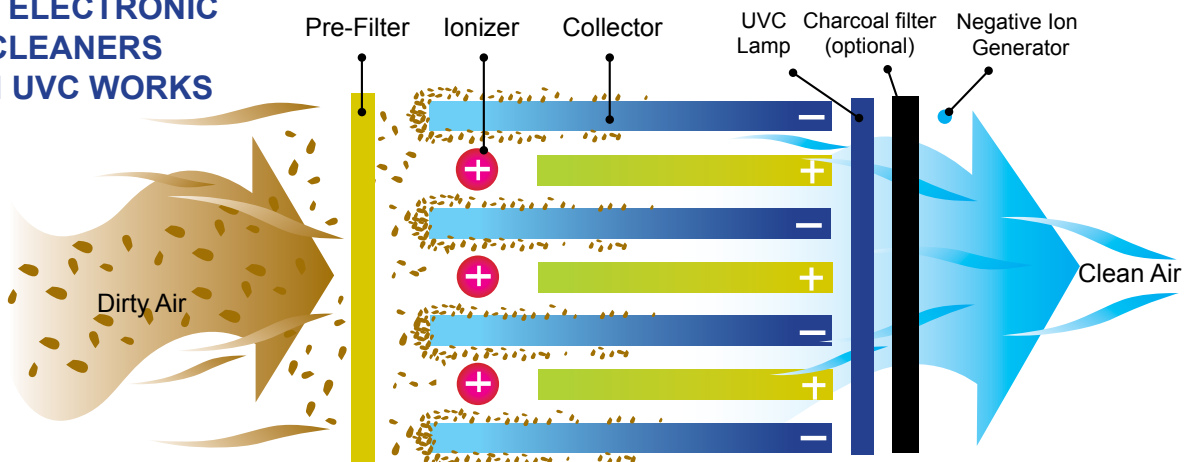

Air passes through the high voltage ionizing section where it is given a high electrical charge. The charged particles then pass through a series of alternately charged plates. The charged particles are repelled by plates with the same polarity and attach to the plates of the opposite polarity.

A 15 watt UVC germicidal lamp adds to the cleaning process by destroying germs, bacteria and viruses in the air as it flows through the machine.

A negative ion generator sends out negative ions to freshen the air in the room.

DM450N/DM900N-DC

CEILING SUSPENDED ELECTRONIC AIR CLEANER

With UVC Germicidal Irradiator




FEATURES

- Infra Red Remote Control
- UVC Germicidal lamps to eliminate germs and bacteria
- 3 Speed motor control for desired rate of cleaning
- Washable Main Filters and Pre-filters
- Optional charcoal filter for odour control.
- Flush Mounted to false ceiling, Fits into 60cm x 60cm and 60cm x 120cm ceiling board.
- Re-circulates clean indoor air without any loss of airconditioning or heating in the room. Dirty air intake in one direction and clean air discharge in 3 directions.
- Collect dust particles from 0.01 microns and up.
- Negative Ions freshens Air in the room.
- For heavy odor, like cigarette smoke, the UVC lamp can be changed to an UV ozone Lamp. The charcoal filter can be omitted. **UV ozone lamp is available on special order only.**

SPECIFICATIONS

	DM450N	DM900N-DC
Dimensions. WxLxH (mm)	570 x 570 x 300	570 x 1150 x 350
Material	1.0mm Electro Galvanised Steel, Powder Coated Grill	
Weight	26 Kg / 28 Kg	42 Kg / 45 Kg
Voltage	230VAC	230VAC
Power Consumption:	100 watts	120 watts
Efficiency	Up to 95%	Up to 95%
Max Air Volume	800 CMH	1550 CMH
Speed/Noise Level	L: 45dB, M:56dB, H:65dB	L: 45dB, M:59dB, H:68dB
Coverage (Floor Area)	40 - 50 Sqm	80 - 100 Sqm
Ionising Voltage	8 Kv	8 Kv
Collecting Voltage	4 Kv	4 Kv
UVC Lamp	15 Watts	15 Watts
Negative Ion Generator	Yes	Yes

COANDA AIR FLOW EFFECT

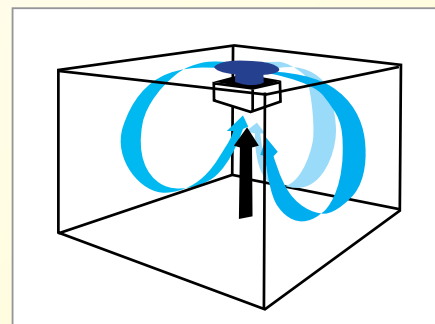

Airverclean Pte Ltd
61 Kaki Bukit Ave 1, #03-19,
Shun Li Industrial Park, Singapore 417943
Tel: 65 6741 5800 Fax: 65 6741 3935
Email: sales@airverclean.com
www.airverclean.com