



USER'S MANUAL & CERTIFICATE OF WARRAN





AC PLASTIC DOMESTIC FANS (Automatic Shutter)

Products with BVN brand are manufactured in production facilities with ISO 9001: 2008 Quality Management System certificate.

























MANUFACTURER'S / IN	IPORTER'S	
NAME	BAHÇIVAN ELEKTRİK MOTOR SAN. TİC. LTD.ŞTİ.	
ADDRESS	Hadımköy Ömerli Mahallesi İstanbul Cad. No:147 Arnavutköy/İSTANBUL	
PHONE / FAX	0212 771 48 48 / 0212 771 48 42	
COMPANY REPRESENTATIVE'S SIGNATURE/SEAL		
PRODUCT'S		
TYPE	FAN	
BRAND	BVN	
MODEL	EC I	
LABEL AND SERIAL NO		
DELIVERY DATE&PLACE		
MAX.REPAIR PERIOD	20 WORK-DAY	
WARRANTY PERIOD	2 YEARS	
SELLER'S		
NAME		
ADDRESS		
PHONE / FAX		
INVOICE DATE&NUMBER		
DATE/SIGNATURE/SEAL		
MÜŞTERININ		
ADI SOYADI		
ADRESi		
TELEFONU		

SAFETY WARNINGS

- These fans contain rotating parts and electrical connections. Therefore, pay attention to safety warnings during their assembly, maintenance and operation.
- Electrical connections and assembly must be made by authorized persons.
- Electrical connections of the fan should not be damaged when the ceiling or the wall is drilled or broken.
- · The product must have an air duct of its own.
- During transport, operation and maintenance, hands should be protected with gloves against cuts.
- The fan should in no way be touched while operating.
- Proper cleaning should be done with periodic intervals; otherwise the product might be harmed.
- Keep the fan away from children and do not let unauthorized people to use it.
- Do not use do product at ambient temperature over 40 °C

TECHNICAL FEATURES IP X0 CLASS II CL B










TYPE	Α	В	С	D
EC 1010 E I	150	45	35	97
EC 1219 E I	170	55	44	118
EC 1530 E I	210	73	60	149

TYPE	< VOLTAGE	FREQUENCY	A POWER	CURRENT	SPEED	AIR FLOW	SOUND LEVEL	WEIGHT
ITPE	V	ПZ	VV	Α	d/d	m³/h	dB(A)	kg
EC 1010 E I	230	50	20	0,1	2650	105	45	0,6
EC 1219 E I	230	50	21	0,12	2335	195	47	0,65
EC 1530 E I	230	50	30	0,17	1920	300	48	0,84

Products supplied on the markings or other printed documents according to the standards of the declared value obtained in the laboratory values. These values may vary depending on operational and environmental conditions of the product.



ASSEMBL




- 1 Mounting frame corresponds to the diameter of the connecting canal was opened to the floor.
- 2 Product casing mounted, connected with the mounting tab.
- 3 As shown in Figure installation.
- 4 Correctly connect the power cord, make sure that looking at the wiring diagram. Device mounted on an all-pole circuit breaker, connect the splitter.
- 5 Make sure you have the appropriate air direction.
- 6 Perform trial operation of the product, check whether vibration and error





CONNECTION / SINGLE-PHASE CONNECTION

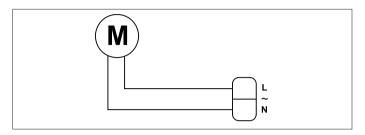

- The products should only be assembled by authorized persons.
- Since products have sharp edges, wearing gloves is recommended.
- If entrance and exit of the products are going to stay open, they should be covered with a culvert to prevent foreign materials from entering.
- Before connecting electric cables, you must not forget to cut the power supply.
- When assembling the devices, be sure that all connections are correctly
 established and that the assembly elements are strong enough to carry
 the weight of the product.
- Even if the product is turned off, be sure that the main power supply is off while connecting the devices.
- Before assembly, check whether the electrical connection information on the product (tension, power, frequency, etc.) conform to the area where the product will be assembled.
- The terminal box cable inlet should be firmly plugged in. The lid should be closed correctly and should prevent water leakage.
- There shall not be any obstacles in the air flow route.
- For safety reasons, the earthing terminal on the electric terminal should absolutely be connected to the building earthing line.
- Be sure that the motor thermic relay and overload relay are connected correctly.
- Cable connection of the product should be like the one in the electrical connection diagram.

USAGE

EC series Plastic fans; bathrooms, toilets, and kitchens are used. This type of stench that occurs in places and is the best solution to clean the polluted air. The front grille is more secure by design and reduces energy losses. Eder. Kanat appealing to the eye with a modern design is easier thanks to the air flow. Great angle and width of the wings and high performance at low volume captures. Improved flow design provides more efficient cutting with reflux. Electrical connection is quite easy and safe. Depending on the type of side air flow assembly accessories are available. Installation, disassembly and cleaning is easy. Ceilings, windows and wall mounting can be made.

Users of plastic type fans before use carefully read the operating and maintenance instructions are required

Expected life of the products is 10 years.

When using your product for the first time;

- Before connecting electric cables, you must not forget to cut the power supply. Be sure that electrical connections of the product are established correctly and safely.
- Be sure that safety equipment is connected correctly.
- · Properly establish earthing connections.
- Be sure that the cable and electric connection box are closed correctly and do not admit water leakage.
- Air exit direction should be in the direction indicated with the label on the body. There shall not be any obstacles in the air flow route.
- The wings should rotate in the correct direction.
- While the product is operating, there shall not be any vibration or internal rubbing or hitting voice due to the rotation of the fan or the suction fan.
- Power supply, current and frequency values shall comply with the product label.
- If any electricity warning device turns on, electric connection should immediately be cut from the main power supply. Before starting the product, all the installation should be controlled again carefully.
- If any problem occurs, please consult authorized persons.

In case of any defect after you have started using the product continuously, the type of defect should be determined. In order to remove the defect, the technical service must be contacted. You must not try to fix the problem yourself.





DEFECTS AND HOW TO FIX THEM

ABNORMAL SITUATION	POSSIBLE CAUSE	HOW TO FIX
TOO MUCH SOUND (NOISE)	ROTOR IMBALANCE	CHANGE THE ROTOR
THE DEVICE IS NOT WORKING	MOTOR IS DAMAGED	CHANGE THE MOTOR
	CONDENSATOR IS NOT WORKING	CHANGE THE CONDENSATOR
	FAULTY SPEED ADJUSTMENT CONNECTION	CHECK THE INSTALLATION (ASSEMBLY)
THE DEVICE IS ROTATING SLOWLY	FAULTY CONNECTION	CHECK THE ELECTRICAL CONNECTION

CLEANING, MAINTENANCE and TRANSPORT

In order to protect your product from being damage during transport;

- The product has been packaged according to normal transport conditions. In order to avoid possible damage, it should always be carried in its original package.
- The product shall be kept in its own package in a vibration-free, dust-free environment away from abrasive orchemical material until it isdelivered to its placeof assembly. Do not accept the products which are not in their original package or which were opened before being delivered to you.
- The products should be stocked into the vehicle in a way to stay motionless in case of any turn over or fall down.
- While heavy products are being carried, use appropriate lifters to protect products or the people carrying the products.
- All necessary measures should be taken in orderto prevent damages arising from sudden and careless lifting and putting down.



USER'S MANUAL &

 The products should be carried one by one carefully. They shall not be thrown or carried carelessly from hand to hand.

After taking the product out of its package;

- · The delivered product should be checked.
- The product must be checked for damage during transport. If thereis any lost or damaged part, it should immediately be informed to the transporter or our firm verbally or by writing.
- Do not hold the product on its connection box or electric cables. Abstain from applications which will damage the wings or the protective cage while carrying.

Periodic cleaning and maintenanceof the product;

- Before cleaning or maintenance, even if the product is turned off, be surethatelectric connection has been cut from the main power supply.
- All electrical equipment should be regularly controlled, connections should be checked and damaged or worn-out cables and equipment should be replaced.
- Periodic maintenance should be carried out at least once every six months or more frequently, depending on its frequency of use. Maintenance and cleaning of the products should be carried out by qualified staff.
- Check the product regularly. In order to prevent dirt or accumulations in the wing, motor or grill, carry out the maintenance according to the operating conditions of the product. Otherwise, the expected life of your product can be substantially shortened or serious damage can occur.
- While cleaning the product, pay attention to protecting the balance on the wing and the turbine.
- Bolts which might become looseduring maintenance should be checked.
- · Inappropriate parts should be immediately replaced.
- The product should not be cleaned with inflammable or combustible cleaners; it should be cleaned with a wet cloth.
 The product should in no way be exposed to water or pressure water.





WARRANTY and SERVICE

Dear customer.

We believe that providing good service is as important as providing good products for you. You can contact our Sales Representatives by calling us or obtain the most suitable service for you by contacting our Authorized Dealers.

We recommend you to follow the advices below.

- 1. When you buy a product, have your Authorized Dealer approve the Warranty Dee
- 2. Use your product according to the user's manual.

The warranty provided by BVN does not cover the damages arising out of using the product under conditions other than its normal conditions of use. The following conditions are also not included in the warranty:

- 1. Damages and defects arising out of faulty usage,
- Damages and defects which occur while loading, unloading or carrying the product after ithas been delivered,
- Damages and defects arising due to low or high voltage, faulty electrical installation and using the product at a different voltage than the one written on its label.
- 4. Damages and defects due to fire, eathquake, lightening strike, etc.
- 5. Damages occuring due to using the product under conditions not conforming to the issues stated in the user's manual.

The above-mentioned damages are fixed on payment. Assembly and transport of the product is not included in the product price.

The responsibility of approving the warranty deed and submitting it to the customer belongs to the seller, dealer, agency or representative from which the customer has purchased the product.

Since the invoice will be taken as reference if a misunderstanding occurs about the warranty period, the user must keep the invoice and a copy of it together with the Warranty Deed.

If the warranty deed is altered, the original serial number on the product is removed or altered; the warranty deed will become invalid.



USER'S MANUAL &

WARRANTY TERMS AND CONDITIONS

- 1 The warranty period is 2(TWO) YEARS from the date of delivery .
- 2 The product including all its components is under the warranty of our company.
- 3 In case of defects within the warranty period, the period spent in repairing is added to the warranty period. The repairing period is maximum 20 days. This period starts from the date of delivery of the product to the services centre or in case of absence of service centre to the seller, the agency the representative, the importer or the manufacturer of the product respectively. In case the defect is not repaired within 10 work-days, the importer or the manufacturer is entitled to supply another product with similar features until the repair is completed. The warranty period of the replaced product is limited with the warranty period of the product which is purchased.
- 4 In case the product has material ,workmanship and manufacturing defects during warranty period ,the product will be repaired free of charge and expenses of any sort including labor ,the value of the parts replaced or any our charges.
- 5 The consumer may request for replicement of product free of charge, refund of payment or price reductions in the rate of defects
 - In case the product permanently dysfunctions due to repeating of the same defect for more than twice or more than twice or more than four dyfferent times within the warranty period
 - In case the maximum period for repairing is exceeded
 - In case it is determined by a written report that the defect cannot be removed by the seller ,agency, representative, importer or manufacturer of the product respectively in case of absence of service centres.
- 6 The present warranty does not cover damages resulting from use of product against the instructions in the manual.
- 7 General Administration of Protection of Consumer Rights and Competition in the Ministry of Industry and Commerce may be applied for problems regarding the warranty certificate.
- 8 Inaccordan cewithissues of consumer complaintsand objections on the application consumers can appeal the consumer courtsandarbitral committee.
 - Incase of the goods are found to be defective when consumers
 - a-) Sold by declaring that it is ready to give back there turn from the contract,
 b-) Sold goods are held defective ratiod is count that request according to the salesprice.
 - c-) Unless require an excessive charges including all costs borne by the seller that request a free repair of the goods which has been sold.
 - ç-) If possible, ask for the replacement of free from defectsin stead of goods sold

Consumer can use one of the elective rights. Seller's preferred consumer is obliged to ful fill this demand.

